

GL2 and GL3 Series

Slot Sensors

- Easy mounting, quick installation
- Infrared light source
- Fast response time
- Sharp light spot
- Enhanced immunity to ambient light
- No external adjustments
- 3- and 4-wire connection types
- Wide operating voltage 5 ... 30 VDC




GL2 and GL3 Series

GL2 and **GL3** housing styles:



GL3s

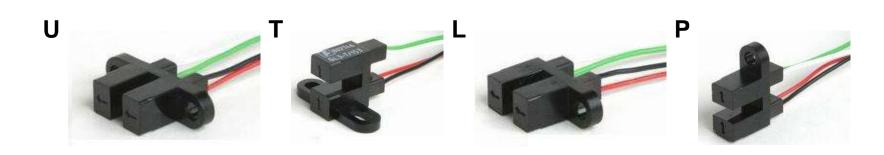



GL2 and GL3 Series

- Small part detection
- Machine positioning in X and Y axes
- Home position detection
- Label detection

