




Standard Cylindrical

- **Switch point or analog outputs**
- **Potentiometer or pushbutton configurable**
- **Optional software interface for advanced functionality (filters, operation modes, etc.)**
- **12-bit resolution to distances of 20 feet**
- **Models with pivoting sensing head**
- **The latest ultrasonic technology**



Standard Cylindrical

Sensing Ranges

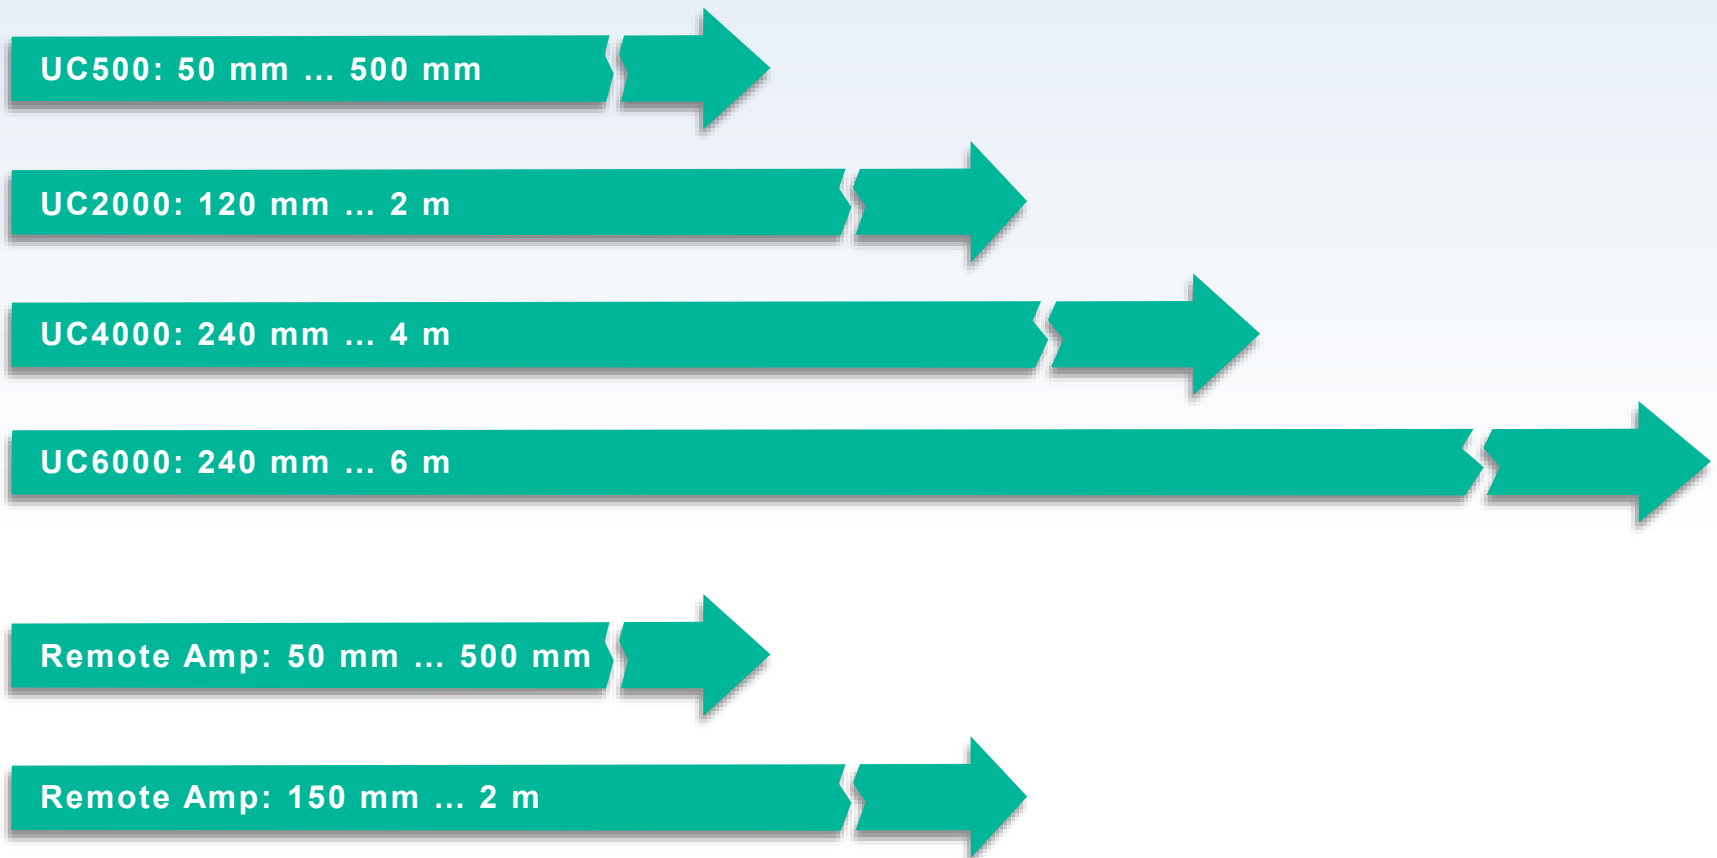



Standard Cylindrical

- **Environments too dusty/dirty for photoelectrics**
- **Objects of transparent or changing colors**
- **Collision avoidance**
- **Level control**
- **Presence/absence of bulk materials**

